

PRE ATOMIZATION TECHNOLOGY
LARGE SPRAY PATTERN
LOW EMISSION

HVLP



designed by *pininfarina*




Environment and Performance

The new Entech LS400 represents the completion of the Supernova range of products. Entech LS400 offers to professional users a wide range of applications for Water Base Coats of second and third generation according to weather conditions (hot and dry climates and cold and high humidity climates) with a choice of 2 different set ups, ET and ETS. HVLP technology and Pre atomization technology coupled together give to users a very high comfort of application, a stable and large fan pattern, high stability in droplet sizes and maximum material savings at only 400 lt air volume.

LS-400

ANEST IWATA

SUPERNOVA series: application and climate chart

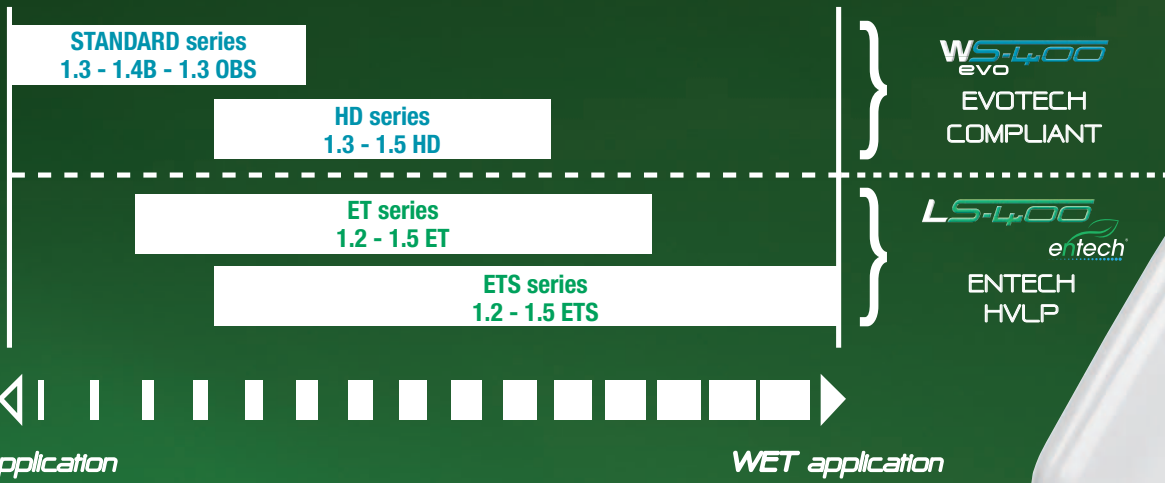

LS-400
entech®



| Model | ø mm | bar | Nℓ/min | m³/min | MIN | MAX | MAX | No. | g | Type of application |
|----------------------|---------|-----|--------|--------|-----|-----|--|---------------------------------|----------------------|---------------------|
| LS-400 ENTECH | | | | | | | | | | |
| LS-400-1205 | ET 1.2 | 1.8 | 400 | 150 | 250 | 350 | LS-400-05 | 695 with cup 475 without cup | Standard application | |
| LS-400-1305 | ET 1.3 | | | 160 | | | | | | |
| LS-400-1405 | ET 1.4 | | | 170 | | | | | | |
| LS-400-1505 | ET 1.5 | | | 180 | | | | | | |
| LS-400-ETS12 | ETS 1.2 | 1.8 | 420 | 150 | 230 | 305 | Wetter & Longer spray distance application | | | |
| LS-400-ETS13 | ETS 1.3 | | | 160 | | | | | | |
| LS-400-ETS14 | ETS 1.4 | | | 180 | | | | | | |
| LS-400-ETS15 | ETS 1.5 | | | 190 | | | | | | |
| | | | | 240 | | | | | | |

Max. working pressure: 7.0 bar Temperature range: 5~40° C Air nipple: G 1/4" M Fluid nipple: G 1/4" F

ANEST IWATA

ANEST IWATA Scandinavia - Ögärdesvägen 6C, 433 30 PARTILLE - Sweden
Tel. +46 31 340 28 60 - Fax +46 31 340 28 69
info@anest-iwata.se - www.anest-iwata.se

www.anest-iwataeu.com
www.supernovaspray.com